


3 in 1 Face Mask Machine

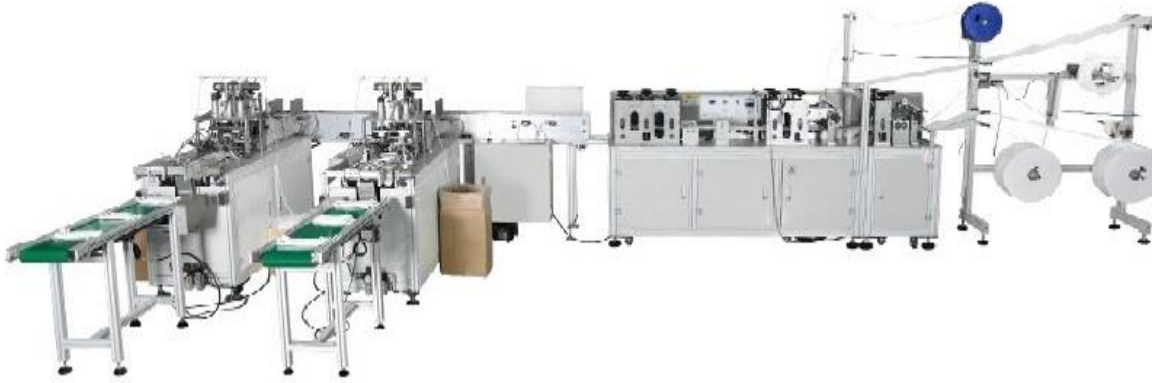

1.FUNCTION:

This machine is a unit of fully automatic ear-loop mask making machine. This machine unify 1 unit sheet body making machine and 2 units ear loop spot welding by a unit of automated dispenser.

Mask bodies produced on mother machine can be allocated onto 2 units child machine averagely by PLC at the speed of 100-120 pieces per minute. All of operation of the machine

is controlled through touch screen, the interface of man and machine.

On this combination the mask body machine can match with 1/2/3/4 units of ear-loop machine

2.FEATURES:

The machine is made of aluminum alloy which makes it beautiful, prevented from rust and has a small size.

The machine can make the 1--5 levels mask blank according for the customer's require with a high output;

You can adjust the size of the mask blank and the folding location;

The direction of the ear loop is outside;

Compared with sub-mask production equipment, this set of equipment more efficient, more economical artificial;

The computer program control and photoelectric detection make it have a high reliability and low failure rate;

3.SPECIFICATION:

Machine size: 6500(L)*2800(W)*1800mm

Output: 100-120pcs/min

Line source: 220V 50hz, 1 phase

Air compressor :6kg/cm²(minimum)






Power consumption: 11KW




Material Specifications:

1.	Product Type	Disposable 3 layers Surgical Medical Face Mask
2.	Mask Size	175mm×95mm
3.	Dark Color SS Non Woven Fabric – for Outer Surface Layer	25gsm, 200mm width
4.	White Color Meltblown -Filter Layer	22gsm, 175mm width

5.	Light/White Color SS Non Woven Fabric - for Inner Layer	20gsm/25gsm, 175mm width
6.	Nose Clip	Plastics/Iron Material
7.	Ear Loop	3mm diameter Chinlon Fabric

Ear Loop Mask Materials Consumption

Item name	Ear loop	Meltblown Fabric	Nonwoven	Nonwoven	Nose holder
Photo					
Specification	Thickness:1 mm	Thickness :20g Width :17.5 cm	Thickness :20 g Width: 17.5 cm	Thickness :25 g Width : 20 cm	Thickness :1 mm
Consumption	3500 pcs/KG	2000 pcs/KG	1600 pcs/ KG	1500 pcs/ KG	3000 psc/KG

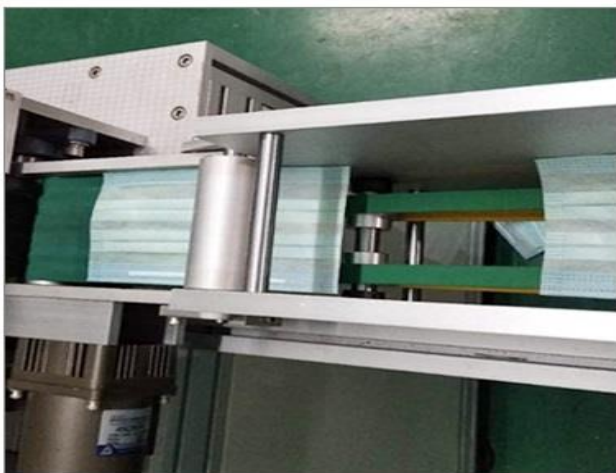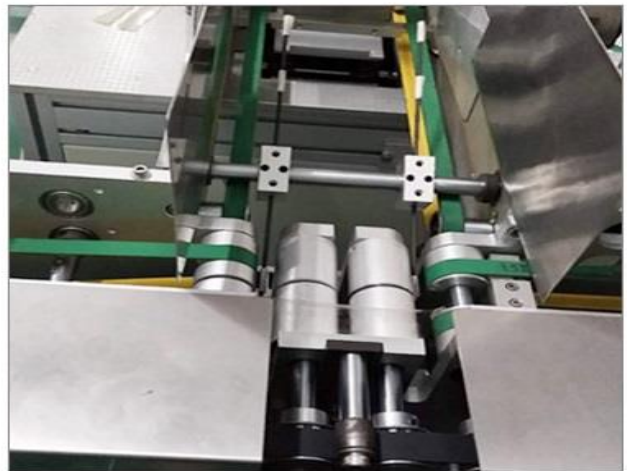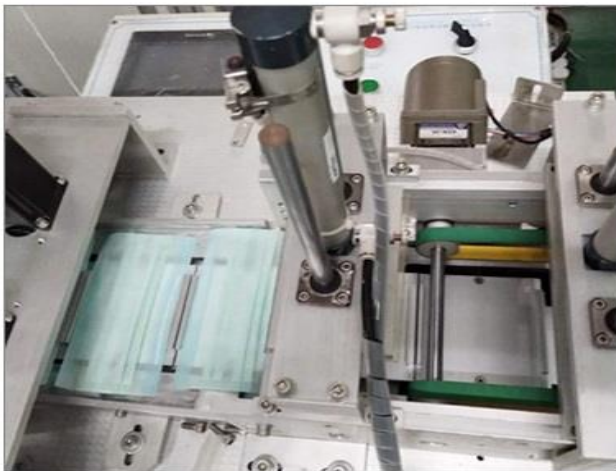



Guarantee: one year

Terms of payment: 50% deposit and pay the balance before shipment after testing the machine in seller's factory.

Machine production time: 45days after receiving 50% deposit.

Installment: If the customer need our factory to send engineer to go to his factory to install and test the machine, the customer need to bear his Visa, go and return tickets and eating and lodging in his country and salary USD100/day.