


Masini de pliat-lipit carton ondulat pentru productia de cutii


Parametrii pentru lipire intr-un punct

Parametru / model	1250E	1450E	1650E	1850E	2050E
A + B + C + D	200 – 1.200 mm	200 – 1.400 mm	200 – 1.600 mm	200 – 1.800 mm	200 – 2.000 mm
Min. C + D	100 mm	100 mm	100 mm	150 mm	140 mm
Min. D	25 mm	25 mm	25 mm	25 mm	25 mm
Min. F	100 mm	100 mm	100 mm	100 mm	100 mm
G	150 – 800 mm	150 – 800 mm	150 – 800 mm	150 – 800 mm	150 – 800 mm

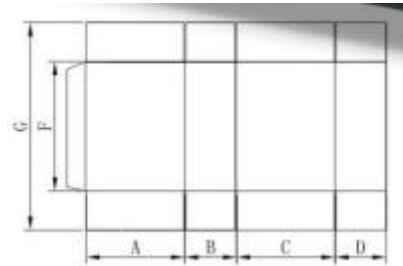

Parametrii pentru fund cu autoformare

Parametru / model	1250E	1450E	1650E	1850E	2050E
A + B + C + D	250 – 1.150 mm	250 – 1.350 mm	250 – 1.550 mm	380 – 1.750 mm	380 – 1.950 mm
Min. C + D	125 mm	125 mm	125 mm	190 mm	190 mm
Min. D	25 mm	25 mm	25 mm	25 mm	25 mm
Min. F	100 mm	100 mm	100 mm	100 mm	100 mm
G	150 – 800 mm	150 – 800 mm	150 – 800 mm	150 – 800 mm	150 – 800 mm
Min. H	30 mm	30 mm	30 mm	30 mm	30 mm

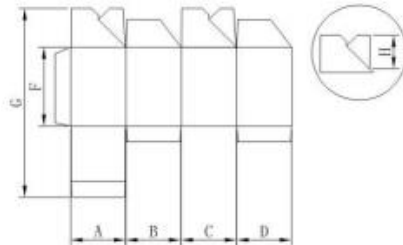

Detalii tehnice

Parametru / model	1250E	1450E	1650E	1850E	2050E
Viteza maxima	280 m / min	280 m / min	280 m / min	280 m / min	280 m / min
Materiale pretabile	Carton ondulat tip A/B/E/F				
Adeziv folosit	Pe baza de apa				
Alimentare	380 V / 50 Hz				
Putere totala	11,5 kW	11,5 kW	11,5 kW	15 kW	15 kW
Greutate	8.000 kg	8.500 kg	9.000 kg	9.500 kg	10.000 kg
Gabait (mm)	14.500 x 2.000 x 1.700	14.500 x 2.200 x 1.700	14.500 x 2.400 x 1.700	14.500 x 2.600 x 1.700	14.500 x 2.800 x 1.700