


## SLITTER REWINDER Modele –FQ 2500-2100-1600-1300

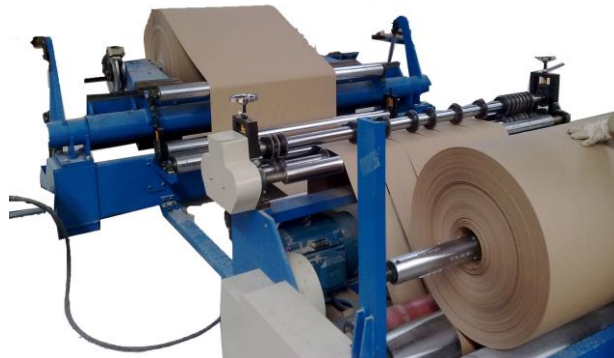

Latime maxima bobina.....	2600 /2100mm / 1600mm/ 1300 mm
Grosime hartie.....	..80g/mp-800g/mp
Derulator rola master.....	shaftless, pentru bobine de 3",4",6"la cerere
Latime minima rola master.....	600 mm
Diametru miez la rebobinare .....	3"(76mm) sau la cerere 4",6"
Numar axe de rebobinare.....	1
Latime rola la eliminare .....	Min. 50 mm
Diametru max rola master .....	Φ2000mm/ Φ1600mm/ Φ1300mm Φ1000mm
Diametru max rola rebobinare.....	Φ1600mm/ Φ1300mm/ Φ1000mm Φ 750mm
Numar max de seturi de cutite incluse.....	30 ; scule suplimentare la cere
Viteza de rebobinare .....	max 140m/min
Web tension .....	pe derulare si pe infasurare
Putere instalata .....	18/ 15 / 11 / 7 kW/ 380V/ 50 Hz
Lungime.....	4534/3100/ 2370/ 1800mm
Latime.....	4509/4300 /2500 / 1620mm
Inaltime.....	1600/ 1400/ 1300 / 1200mm
Greutate.....	5500 /3500 / 2700 / 1700 kg
Declaratie/Certificat de conformitate .....	CE
Opertori	1

Pret –.....LA CERERE

Timp de livrare:90-120 zile de la contract / incasare avans

Filme cu probele de functionare la o masina de 2,1m instalata la Pitesti

<http://www.youtube.com/watch?v=EwicFlokPo&feature=youtu.be>

<http://www.youtube.com/watch?v=CC06LPGZBsM>




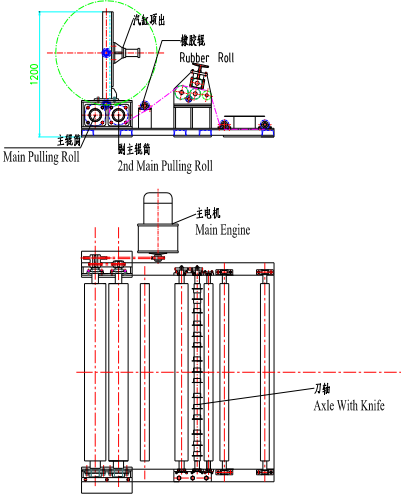
[http://www.youtube.com/watch?v=CVxB\\_un0HDc](http://www.youtube.com/watch?v=CVxB_un0HDc)

<http://www.youtube.com/watch?v=5fri8j9XXVk>

<http://www.youtube.com/watch?v=ZYyilE1E5-8>

Video de la producator: <https://www.youtube.com/watch?v=whzkPQuJshI&feature=youtu.be>

## Parti componente si parametri pentru slitter rewinder

Nume	Parametri	cant
<p>1. Port-bobina master</p>	<p>1. Ridicare hidraulica sau electrica , reglaj lateral automat, tensiune automata in banda</p> <p>2. Rola max: 2600x 2000/2100 x 1600 mm/ 1600 x 1300mm/ 1300 x 1000mm</p>  	1
<p>2. Sistemul de taiere si rebobinare</p>	<p>1. Sistemul cuprinde: taierea cu role, controlul tensiunii in banda-programabil, eliminarea deseurilor si rebobinarea produsului. Diametru max rola rebobinata: 1600 /1300 / 1000 / 750 mm</p> <p>2. Putere exhaustor deseuri 3,2/ 2,2 / 1.75 / 1,6 kW</p>  	1

1. Pentru toate echipamentele: Echipamente noi; Garantie 1 an;
2. Echipamentele oferite sunt conforme cu normativele EU de protectia muncii
3. Echipamentele oferite cuprind tehnologie nu mai veche de trei ani, conf. 2006/42/CE actualizat
4. Transport, montaj, instruire personal –gratuite.
5. Perioada de valabilitate a ofertei 180 zile.

Cu salutari cordiale,  
Nicolae Oprica,  
0725 77 66 55

14.02.2016

